


**This MotoCAP safety rating applies to:**


Brand	Camino Motorcycle Wear
Model	Armalith Regular Jeans
Type	Pants - Denim
Date purchased	20 January 2025
Sizes tested	36 and 40
Test garment gender	Male
Style	All Purpose
RRP	\$349.00

Test Results Summary	Rating	Score
MotoCAP Protection Rating	★	23.2
Abrasion	2/10	1.80
Burst	10/10	1414
Impact	1/10	0.0
MotoCAP Breathability Rating	★★★	0.434
Moisture Vapour Resistance	-	19.0
Thermal Resistance	-	0.138
Water resistance	N/A	N/A

Pockets are provided at the knees and hips for fitting aftermarket impact protectors. Adding knee and hip impact protectors would improve the protection levels of this garment. There are no vents to allow airflow movement through the garment.

**Jacket and Pants - Crash Impact Risk Zones**

This diagram is a pictorial representation of the crash impact risk Zones.

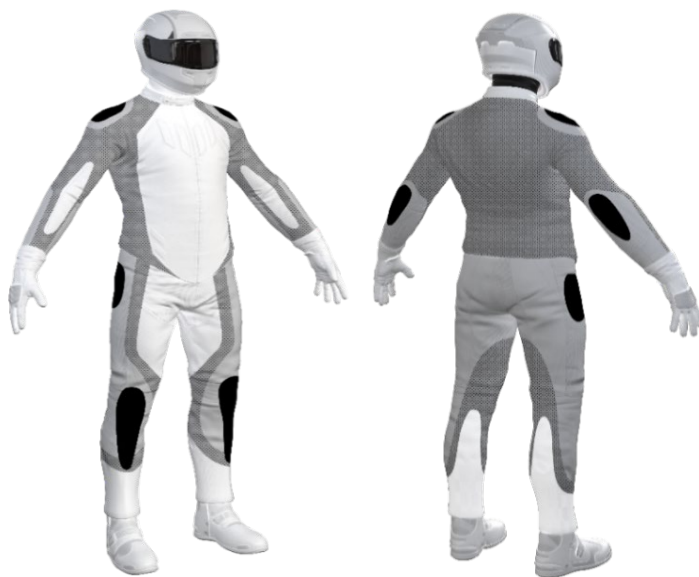

Zone 1	Zone 2	Zone 3	Zone 4
High risk of abrasion High risk of impact	High risk of abrasion	Medium risk of abrasion	Low risk of abrasion

**Removable liners**

Thermal liner

Water-resistant liner


**Removable impact protection**

Knee  
Hip

Pockets

Armour



## Abrasion Resistance

These pants were tested for abrasion resistance in accordance with MotoCAP test protocols. The diagram below is a visual indication of the likely abrasion performance of the materials in each zone calculated from the data in the table below. The colour coding is based on the worst performing material in each zone.



### Abrasion Resistance Performance

Abrasion rating	2/10
Abrasion score	1.80

Determining Criteria	Area	Good	Acceptable	Marginal	Poor
High abrasion risk	Zones 1 & 2	> 5.6	3.0 - 5.6	1.3 - 2.9	< 1.3
Medium abrasion risk	Zone 3	> 2.5	1.8 - 2.5	0.8 - 1.7	< 0.8
Low abrasion risk	Zone 4	>1.5	1.0 - 1.5	0.4 - 0.9	< 0.4

**Individual Abrasion Resistance Results:** - The table below shows the test results for time to abrade through all layers of the materials. Calculated for each sample by Zone, type and area coverage of each material as a proportion of that Zone. Abrasion times are capped at a maximum of 10.00s.

### Abrasion time for each test (seconds)

Zones 1 & 2	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Material A	100%	2.34	1.83	1.29	1.95	2.02	1.38	1.80	M
Zone 3	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Material A	100%	2.34	1.83	1.29	1.95	2.02	1.38	1.80	A
Zone 4	Coverage (%)	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Material A	100%	2.34	1.83	1.29	1.95	2.02	1.38	1.80	G

### Details of materials used in pant

Material A	Denim fabric shell
------------	--------------------

## Burst Strength

These pants were tested for burst strength in accordance with MotoCAP test protocols. The diagram below illustrates the burst strength results in terms of the likely performance of the garment in an impact and is a pictorial representation of the data from the table below.



### Burst Strength Performance

Burst rating	10/10
Burst score	1414

Determining Criteria	Unit	Good	Acceptable	Marginal	Poor
Burst strength	(kPa)	> 1000	800 - 1000	500 - 799	< 500

**Individual Burst Strength Results:** - The table below shows the burst pressure in kilopascals (kPa) for each sample tested by Zone and the average result for each zone.

### Burst pressure for each seam (kPa)

Area	Sample 1	Sample 2	Sample 3	Sample 4	Sample 5	Sample 6	Average	
Zones 1 & 2	1192	1622	1791	1481	878	1262	1371	G
Zones 3 & 4	1705	1108	1809	1591	1420	1882	1586	G

## Impact Protection

These pants were not tested for impact protection as impact protectors were not provided with the garment. The diagram below is a visual indication of the likely performance of each impact protector calculated from the data in the table below. The colour coding is based on the worst performing score for average or maximum force for each impact zone. Areas shaded black are not considered for impact protection ratings.



### Impact Protection Performance

Impact rating	1/10
Impact score	0.0

Determining Criteria	Unit	Good	Acceptable	Marginal	Poor*
Impact force	(kN)	< 15	15 - 24	25 - 30	> 30

\* Poor may also indicate that no impact protector, or impact protector pocket is present in the garment

**Impact Protector Results:** - The table below shows the average and maximum force transmitted through each impact protector type in kilonewtons (kN) and their area of coverage as a proportion (%) of the Zone.

Impact protector type	Knee	Hip
Average force (kN)	P	P
Maximum force (kN)	P	P
Coverage of Zone 1 area	0%	0%
Coverage of Zone after displacement	0%	0%

**Individual Impact Protector Results:** - The table below shows the test results for each strike on individual impact protectors in kilonewtons (kN) and the position of the strike. Individual strike results are capped at a maximum of 50kN.

### Force transfer for each impact strike (kN)

Impact protector type	Knee	No impact protector present			Hip	No impact protector present		
Strike location	Centre	Mid	Edge		Centre	Mid	Edge	
Impact Protector 1								
Impact Protector 2								
Impact Protector 3								

### Breathability

These pants were tested for breathability following the MotoCAP test protocols. The table below shows the moisture vapour resistance and the thermal resistance values obtained.

#### Without removable liners

Breathability rating	★★★
Breathability score	0.434

#### With water-resistant liner

Breathability rating	N/A
Breathability score	N/A

Moisture Vapour Resistance - $R_{et}$ (kPa.m <sup>2</sup> /W)	1	2	Average
Without removable liners	19.1	19.0	19.0
With water-resistant liner	N/A	N/A	N/A
Thermal Resistance - $R_{ct}$ (K.m <sup>2</sup> /W)	1	2	Average
Without removable liners	0.134	0.141	0.138
With water-resistant liner	N/A	N/A	N/A

### Water spray and rain resistance

These pants have not been advertised as water-resistant so have not been tested for water spray and rain resistance.

#### Assessment Details.

Brand	Camino Motorcycle Wear
Model	Armalith Regular Jeans
Type	Pants - Denim
Date purchased	20 January 2025
Tested by	AMCAF, Deakin University
Report approved by	MotoCAP Chief Scientist
Garment test reference	P25D13
Rating first published	March 2025
Rating updated	24 March 2025